
AVAILABLE IN A WIDE SIZE RANGE: 1/2" TO 6" PIPE 4" & 6" MODELS AVAILABLE FOR SCH. 35 OR 40 PIPE QUICK & EASY INSTALLATION PROVIDES LQUID TIGHT & VAPOR TIGHT SEAL NO MOUNTING HARDWARE REQUIRED.

MADE FROM DURABLE RUBBER MATERIAL.

AAF SERIES

PAGE 1

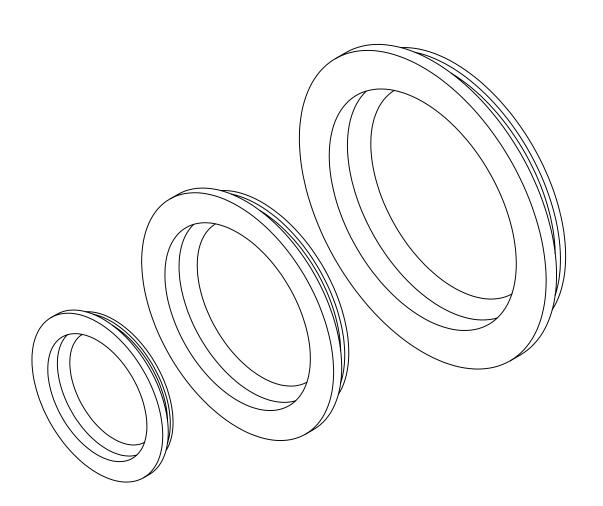

ALL INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.

CHANGES		TOLERANCES	DRAWN BY	DATE	
E		DECIMALS .xxx = ±.005	D. MIDDLETON	03/20/07	]
l		.XX = ±.003 .XX = ±.010 FRACTIONAL X/X = ±.1/64	MATERIAL SPECIFICATI	PECIFICATION:	
			AS NOTED		Ŀ
В		ANGLES	AS NOT	Lυ	lN
IA		$X^* = \pm 1/2^*$			Ι΄ ΄



SPECIFICATION SHEET DIMENSIONAL DATA

SCALE: PART NO.

NONE TANK FITTINGS