



CORD TO BE 16/2 SJOW/SJOW-A  
 ASS'Y SUPPLIED WITH PIPE MOUNTING BRACKET AND  
 SST HOSE CLAMP (RANGE Ø2½" TO Ø1.9")

**VERTICAL FLOAT**


PAGE  
1

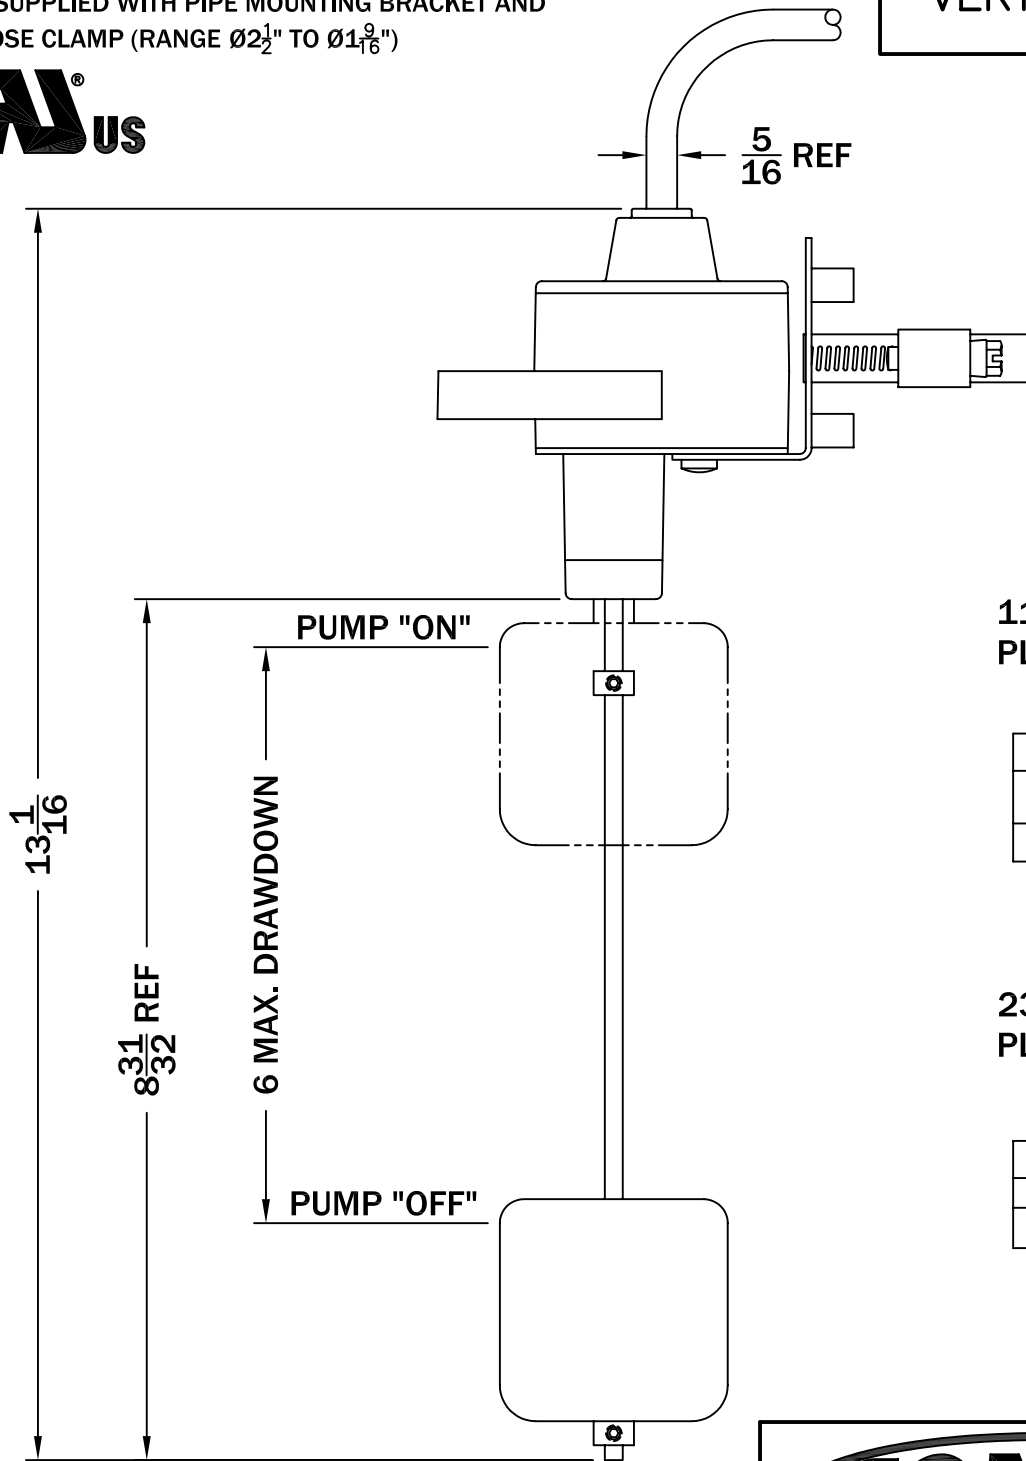

**115V PIGGYBACK  
PLUG OPTIONAL**



**230V PIGGYBACK  
PLUG OPTIONAL**



ALL INFORMATION CONTAINED IN THIS DRAWING IS  
 CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.



CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS .xxx = ±.005	D. MIDDLETON	02/20/04
E	.xx = ±.010	MATERIAL SPECIFICATION:  AS NOTED	
D	FRACTIONAL		
C	x/x = ±.1/64		
B	ANGLES		
A	x' = ±1/2'		


**SPECIFICATION SHEET  
MECHANICAL FLOAT**

SCALE:	PART NO.
<b>HALF</b>	<b>VERTICAL FLOAT</b>

**TYPICAL APPLICATION  
SIMPLEX PUMP SYSTEM**

**VERTICAL SWITCH**

PAGE  
2

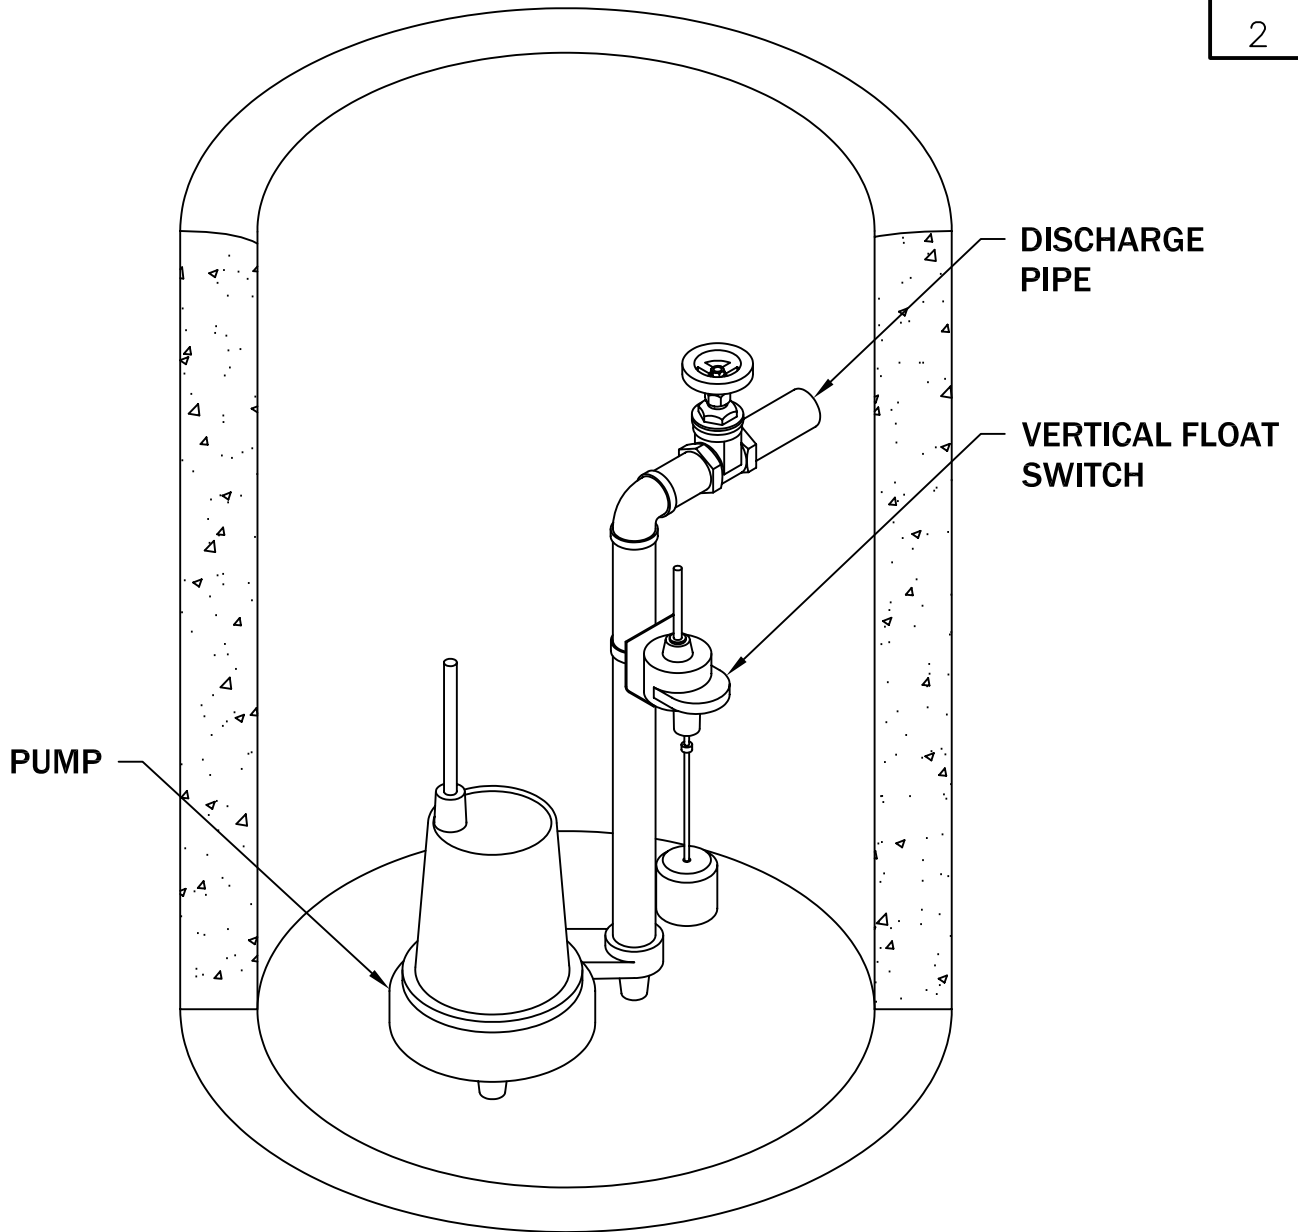

ALL INFORMATION CONTAINED IN THIS DRAWING IS  
CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.



CHANGES	TOLERANCES	DRAWN BY	DATE	SPECIFICATION SHEET MECHANICAL FLOAT	
F	DECIMALS	D. MIDDLETON	02/20/04		
E	.XXX = ±.005	MATERIAL SPECIFICATION:  AS NOTED		SCALE:	PART NO.
D	.XX = ±.010			NONE	VERTICAL SWITCH
C	FRACTIONAL				
B	X/X = ±.1/64				
A	ANGLES				
	X' = ±1/2'				